

OPTICOM™ 764 Phase Selector

DESCRIPTION

The Opticom 764 Multimode Phase Selector is a plug-in, four-channel, dual-priority, multimode encoded signal device designed for use with both Opticom infrared system (IR) emitters and detectors and Opticom GPS radio/GPS intersection units and vehicle equipment. It can be installed directly into the input files of Type 170 traffic controllers equipped with priority phase selection software and in virtually any other traffic controller equipped with priority phase selection inputs and related software. Phase selectors are powered from AC mains or 24 VDC and contain their own internal power supply to support Opticom IR detectors and Opticom GPS radio/GPS units.

The Opticom 764 Multimode Phase Selector may be used in IR only applications, GPS only applications, or IR and GPS applications simultaneously.

The Opticom 760 Card Rack is required when input file space is not available. When used in GPS only mode, the Opticom 1040 Card Rack may also be used.

Opticom 764 Multimode Phase Selector recognizes and discriminates among three distinct Opticom IR emitter frequency rates via Opticom detectors: high priority, low priority and probe priority. Within each of these three frequency rates, the phase selectors further discriminate among 10 classes of vehicle identification codes, with 1,000 individual vehicle codes per class — 10,000 total per frequency rate. The Opticom 764 Multimode Phase Selector also recognizes three different priority levels transmitted by Opticom GPS vehicle equipment: high priority, low priority and probe priority. Within each of these three priority levels, the phase selectors further discriminate among 254 agency IDs, 15 classes of vehicle identification codes, with 10,000 individual vehicle codes per class — for more than 38 million total per priority level.



Opticom 764 Multimode Phase Selector internally records each system activation. Each entry contains:

- Intersection name
- Date and time of the activity
- Vehicle class code of the activating vehicle
- Activating vehicle's ID number
- Agency ID (GPS only)
- Channel called
- Priority of the activity
- Final green signal indications displayed at the end of the call
- Time spent in the final greens
- Duration of the activation
- If preempt has been requested and reason if not
- Turn signal status at the end of the call (GPS only)
- Entry, exit and average speed (GPS only)
- Relative priority level
- Conditional priority level



Global Traffic Technologies, LLC
7800 Third Street North
St. Paul, Minnesota 55128-5441
1-800-258-4610
651-789-7333
www.gtt.com

Global Traffic Technologies Canada, Inc.
157 Adelaide Street West, Suite 448
Toronto, ON M5H 4E7 Canada
1-800-258-4610

Global Traffic Technologies, LLC
1210 Parkview
Reading RG7 4TY
United Kingdom
+44 (0) 7799 908916

For complete warranty information visit gtt.com. Please recycle. Printed in U.S.A.
© Global Traffic Technologies, LLC 2017.
All rights reserved. 79-1000-0524-0 (E)

OPTICOM™ 764 Phase Selector

FEATURES

IR only operation, GPS only operation, or simultaneous IR and GPS operation

- Four channels of detection
- Two auxiliary detectors per channel (IR)
- Records green signal displayed at end of preemption
- Compatible with encoded signal and non-encoded signal Opticom IR Emitters
- High and low priority as well as probe frequency discrimination
- Conditional priority for Transit Signal Priority (TSP) (when used with compatible AVL and/or passenger counter)
- “First-come, first-served” priority within each priority level
- Priority-by-class setting via the interface software
- Priority-by-direction setting via the interface software
- Direct installation into CA/NY Type 170 input files
- Automatic range setting using an encoded emitter (IR)
- Call bridging for both IR and GPS calls including mixed mode
- Low-priority output may be configured for first-come, first-served or all-channel active
- User-adjustable range setting up to 2,500 feet of operation
- Compatible with most traffic controllers
- 10/100Mb Ethernet communication on the front panel
- USB 2.0 communication on the front panel
- RS232 communications front port, and rear backplane and Auxiliary Interface Panel
- User-selected communications baud rate of 1,200 to 230,400 bits per second
- Customizable ID code validation

- Flexible programming options for priority control parameters
- Detailed current Opticom System parameter information
- History log of most recent Opticom infrared and GPS system activities (10,000 entries)
- 30,000 frequency/class/vehicle code ID combinations (IR)
- More than 38 million agency/class/vehicle code combinations (GPS)
- Front panel switches and diagnostic indicators for testing
- Accurate infrared signal recognition circuitry
- Precise output pulse
- Definitive call verification
- Regulated detector power supply (IR)
- Optically isolated outputs
- Two character display and keypad to enable diagnostics and test calls to each channel
- Display LED Indicators
 - High- and low-priority test calls
 - Reset to default parameters
 - Range setting
- User-settable range setting by ETA and/or distance (GPS only)
- Varied outputs depending on turn signal status of requesting vehicle (GPS only)
- IR detector inputs may be mapped to any channel
- Diagnostic test
- Advanced built-in diagnostics and testing
- Tested to NEMA environmental and electrical test specifications

ACCESSORIES

Opticom On-site Interface software package

- Opticom 768 Auxiliary Interface Panel
- Opticom 755 Four-Channel Adapter Card (optional)
- Opticom 760 Card Rack

OPERATING PARAMETERS

Four dual-priority and probe frequency channels

- “First-come, first-served” for vehicles with the same priority level (high or low)
- Priority override: always higher over lower
- Opticom GPS Radio/GPS Unit input
- Opticom Infrared System Detector input(s): one per channel on the card edge connector and two auxiliary per channel through the Opticom 768 Auxiliary Interface Panel
- Optional interface software for flexible programming options and call history
- LED indicators
 - Status
 - Radio (GPS mode)
 - Link (GPS mode)
 - High signal/call per channel
 - Low signal/call per channel
 - Two-digit status display
- Two character display and keypad to enable diagnostics and test calls to each channel
- Voltage: 89 to 135 VAC, 60 Hz at up to 500mA or 24 VDC at up to 1 Amp
- Temperature: -37°C to +74°C (-34.6°F to +165.2°F)
- Humidity: 5% to 95% relative
- CE certified
- NEMA TS-2 compliance
- FCC compliance

PHYSICAL DIMENSIONS

Length: 7.0 in. (17.8 cm) x 8.2 in. (20.8 cm) including handle

Width: 2.3 in. (5.8 cm)

Height: 4.5 in. (11.4 cm)

Weight: 0.60 lbs. (272 g)



OPTICOM™ 138 IR Detector Cable

DESCRIPTION

Opticom 138 Detector Cable is designed and manufactured explicitly for use with Opticom Detectors. Opticom 138 cable has three color-coded conductors, a conductive shield and drain, and a black PVC jacket.


This durable, high-quality cable carries the appropriate power to the detector from the Opticom Phase Selector and delivers the necessary quality signal to the phase selector discriminator circuitry up to 1,000 feet (305 m).

FEATURES AND BENEFITS

- Optimized to interface Opticom detectors to Opticom phase selectors or Opticom Discriminators
- Ensures effective range of 2,500 feet (760 m) with Opticom Infrared System components
- Durable construction
 - Suitable for direct burial
 - Suitable for conduit and mast arm pull
 - Suitable for exposed overhead installation*

OPERATING PARAMETERS

- 600 volt rating
- 75° C (167° F) temperature range
- Three-conductor AWG #20 (7x28) stranded, individually tinned copper: yellow, blue and orange
- Aluminized polyester shield with 20% overlap
- Drain AWG #20 (7x28) stranded, individually tinned copper
- Controlled electrical characteristics

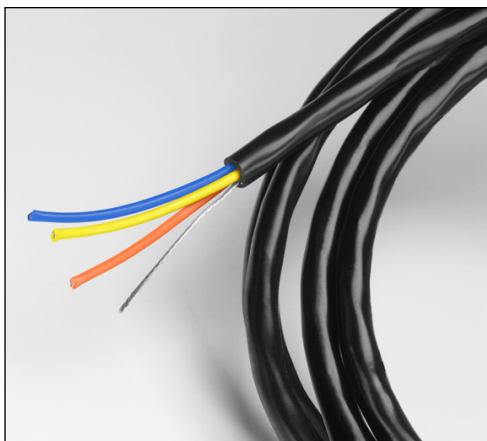

PHYSICAL DIMENSIONS

- Outside diameter: 0.3 in. (7.62 mm)
- Weight: 0.04 lbs./ft. (65.5 g/m)
- Available in: 500 ft., 1,000 ft., 2,500 ft. and 5,000 ft. (152 m, 305 m, 760 m and 15,200 m) spools

*Separate messenger wire required



Global Traffic Technologies, LLC
7800 Third Street North
St. Paul, Minnesota 55128-5441
1-800-258-4610
651-789-7333
www.gtt.com

Global Traffic Technologies Canada, Inc.
157 Adelaide Street West, Suite 448
Toronto, ON M5H 4E7 Canada
1-800-258-4610

Global Traffic Technologies, LLC
1210 Parkview
Reading RG7 4TY
United Kingdom
+44 (0) 7799 908916

For complete warranty information visit gtt.com. Please recycle. Printed in U.S.A.
© Global Traffic Technologies, LLC 2017.
All rights reserved. 75-0500-4553-5 (B)



GLOBAL TRAFFIC TECHNOLOGIES

OPTICOM™ 711/721/722 Detectors

DESCRIPTION

The Opticom 700 Series Detectors transform the optical energy detected from an approaching, vehicle-mounted Opticom Emitter to an electrical signal. The electrical signal is transmitted along a cable to the Opticom Phase Selector or Opticom Discriminator for processing.

Opticom 700 series detectors are mounted at or near the intersection that permits a direct, unobstructed line-of-sight to vehicle approaches. Opticom detectors may be mounted on span wire, mast arm or other appropriate structures.

Opticom 711, 721 and 722 Detectors offer significant advances and flexibility for specific intersection applications.

The Opticom detectors are designed for common applications in three configurations: one direction—the single channel Opticom 711; the single channel, dual detection Opticom 721; and two direction, two output detection—the dual channel Opticom 722.

All Opticom 700 series detectors greatly reduce installation and life cycle costs through their modular design, adjustable tubes, and compatibility with existing Opticom Infrared System intersection and vehicle equipment.

FEATURES

- Advanced electrical transient immunity
- Modular design
- Adjustable turret configuration: accommodates skewed approaches
- Lightweight, durable, high-impact polycarbonate enclosure
- Simplified installation: span wire or mast arm
- Gray door identification of Opticom 722 detector

ACCESSORIES

- Opticom Span Wire Clamp
- Opticom 138 Detector Cable



OPERATING PARAMETERS

- Reception Range: 200 ft. (60 m) adjustable up to 2,500 ft. (760 m)
- Electrical: 24 to 28 VDC, 50 MA minimum
- Temperature Range: -30° F (-34° C) to 165° F (74° C)
- Humidity: 5% to 95% relative

PHYSICAL DIMENSIONS

Opticom 711 Detector

Length: 12.0 in. (30.5 cm)
Width: 4.75 in. (12.1 cm)
Height: 5.63 in. (14.3 cm)
Weight: 0.88 lbs. (400 g)

Opticom 721 and 722 Detectors

Length: 12.0 in. (30.5 cm)
Width: 4.75 in. (12.1 cm)
Height: 7.13 in. (18.1 cm)
Weight: 1.12 lbs. (508 g)

Global Traffic Technologies, LLC
7800 Third Street North
St. Paul, Minnesota 55128-5441
1-800-258-4610
651-789-7333
www.gtt.com

Global Traffic Technologies Canada, Inc.
157 Adelaide Street West, Suite 448
Toronto, ON M5H 4E7 Canada
1-800-258-4610

Global Traffic Technologies, LLC
1210 Parkview
Reading RG7 4TY
United Kingdom
+44 (0) 7799 908916

For complete warranty information visit gtt.com. Please recycle. Printed in U.S.A.
© Global Traffic Technologies, LLC 2017.
All rights reserved. 75-0500-1682-5 (B)